



APC Smart-UPS On-Line, 10kVA/10kW, Tower, 230V/400V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/O rail kit

Brand : APC

Product code: SRT10KXLI

Product name : Smart-UPS On-Line, 10kVA/10kW, Tower, 230V/400V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/O rail kit


Smart-UPS On-Line, 10kVA/10kW, Tower, 230V/400V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/O rail kit

APC Smart-UPS On-Line, 10kVA/10kW, Tower, 230V/400V, 6x C13+4x C19 IEC outlets, Network Card+SmartSlot, Extended runtime, W/O rail kit. UPS topology: Double-conversion (Online), Output power capacity: 10 kVA, Output power: 10000 W. AC outlet types: C13 coupler, C19 coupler, Power plug: Terminal, AC outlets quantity: 10 AC outlet(s). Battery technology: Sealed Lead Acid (VRLA), Battery capacity: 1805 VAh, Typical backup time at full load: 3.8 min. Form factor: Rackmount/Tower, Product colour: Black, International Protection (IP) code: IP20. Width: 263 mm, Depth: 715 mm, Height: 432 mm




Features		Battery	
UPS topology *	Double-conversion (Online)	Cold start	✓
Output power capacity *	10 kVA	Design	
Output power *	10000 W	Form factor *	Rackmount/Tower
Waveform *	Sine	Product colour *	Black
Input operation voltage (min) *	100 V	LED indicators	✓
Input operation voltage (max) *	476 V	International Protection (IP) code	IP20
Input frequency *	40/70 Hz	Certification	CE, CE Mark, EAC, EN/IEC 62040-1, EN/IEC 62040-2, IRAM, RCM, VDE, REACH
Output operation voltage (min)	220 V	Operational conditions	
Output operation voltage (max)	240 V	Operating temperature (T-T)	0 - 40 °C
Output frequency regulation	50/60 Hz	Storage temperature (T-T)	-15 - 45 °C
Surge energy rating	480 J	Operating relative humidity (H-H)	0 - 95%
Number of output phases	1	Storage relative humidity (H-H)	0 - 95%
Efficiency	94.6%	Operating altitude	0 - 3000 m
Crest factor	3:1	Non-operating altitude	0 - 15000 m
Emergency Power Off (EPO)	✓	Technical details	
Noise level	55 dB	Sustainability certificates	ENERGY STAR
Audible alarm(s)	✓	Compliance certificates	RoHS
Auto-restart	✓	Weight & dimensions	
Ports & interfaces		Width	263 mm
AC outlet types	C13 coupler, C19 coupler	Depth	715 mm
Power plug	Terminal	Height	432 mm
AC outlets quantity	10 AC outlet(s)	Weight	111.8 kg
Number of output IEC jumpers	3	Package width	600 mm
USB port	✓	Package depth	1000 mm
Serial interface	✓	Package height	461 mm
Serial interface type	RJ-45	Package weight	126.8 kg
SmartSlot	✓		

Battery		Packaging data	
Battery technology	Sealed Lead Acid (VRLA)	Cables included	USB cable
Battery capacity	1805 VAh	Temperature sensor	✓
Typical backup time at full load	3.8 min	Quick installation guide	✓
Typical backup time at half load	11.5 min	Warranty card	✓
Battery life (max)	5 year(s)	Software CD	✓
Battery recharge time	1.5 h	Logistics data	
Hot-swap battery	✓	Harmonized System (HS) code	85078000
Automatic battery test	✓	Other features	
		Interface	RJ-45 10/100 Base-T
		Nominal output voltage	230 V
		Nominal input voltage	230 V
		Packaging content	Web/SNMP Management Card

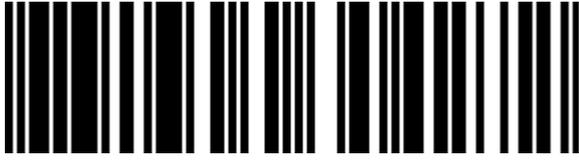

0731304304272



731304304272

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.

Publication date: 18-NOV-2024. Prints or copies of Information are only valid on the printed Publication date