



## APC Smart-UPS On-Line, 10kVA/10kW, Rack/Tower, 230V, 2x IEC C13+1x IEC C19+Hard wire 3-wire (H+N+E) outlets, Network Card, W/O rail kit

**Brand :** APC

**Product code:** SRTG10KXLI

**Product name :** Smart-UPS On-Line, 10kVA/10kW, Rack/Tower, 230V, 2x IEC C13+1x IEC C19+Hard wire 3-wire (H+N+E) outlets, Network Card, W/O rail kit


Smart-UPS On-Line, 10kVA/10kW, Rack/Tower, 230V, 2x IEC C13+1x IEC C19+Hard wire 3-wire (H+N+E) outlets, Network Card, W/O rail kit

APC Smart-UPS On-Line, 10kVA/10kW, Rack/Tower, 230V, 2x IEC C13+1x IEC C19+Hard wire 3-wire (H+N+E) outlets, Network Card, W/O rail kit:

This APC Smart-UPS is designed for IT professionals or network administrators to maintain business uptime and continuity. This 10kVA on-line rack/tower UPS provides pure sine wave power and extended runtime to support critical electronics during power disruptions. It comes with hard wire 3-wire (1P+N+E) input, 2x IEC 320 C13, 1x IEC 320 C19 and Hard wire 3-wire (H+N+E) outlets. The UPS has an embedded Network Management Card for UPS network-based monitoring and management. The UPS comes with PowerChute Network Shutdown that provides graceful shutdown of physical servers, virtual machines, and HCI clusters. The UPS can connect to EcoStruxure IT or third-party centralized management platforms. The UPS is compatible with SRTGRK1 rail kit sold separately.



Features		Battery	
UPS topology *	Double-conversion (Online)	Battery technology	Sealed Lead Acid (VRLA)
Output power capacity *	10 kVA	Battery voltage	96 V
Output power *	10000 W	Battery life (max)	5 year(s)
Waveform *	Sine	Battery recharge time	4 h
Input operation voltage (min) *	100 V	Hot-swap battery	✓
Input operation voltage (max) *	285 V	Automatic battery test	✓
Input frequency *	40/70 Hz	Cold start	✓
Output operation voltage (min)	220 V	<b>Design</b>	
Output operation voltage (max)	240 V	Form factor *	Rackmount/Tower
Output frequency	50/60 Hz	Display type	LCD
Surge energy rating	600 J	LED indicators	✓
Crest factor	3:1	International Protection (IP) code	IP20
ECO mode	✓	<b>Operational conditions</b>	
Output voltage Total Harmonic Distortion (THD)	2%	Operating temperature (T-T)	0 - 40 °C
Noise level	55 dB	Storage temperature (T-T)	-15 - 45 °C
Audible alarm(s)	✓	Operating relative humidity (H-H)	0 - 95%
Audible alarm modes	Alarm when on battery, Low battery alarm, Overload alarm	Storage relative humidity (H-H)	0 - 95%
Auto-restart	✓	Operating altitude	0 - 2011.68 m
<b>Ports &amp; interfaces</b>		Non-operating altitude	0 - 15240 m
AC outlet types	C13 coupler, C19 coupler	<b>Weight &amp; dimensions</b>	
Power plug	Hardwire	Width	440 mm
AC outlets quantity	3 AC outlet(s)	Depth	620 mm
USB port	✓	Height	217 mm
Serial interface	✓	Weight	81.1 kg
Ethernet LAN (RJ-45) ports	1	Package width	590 mm
Emergency Power Off (EPO) connector	✓	Package depth	790 mm
		Package height	414 mm
		Package weight	83.1 kg

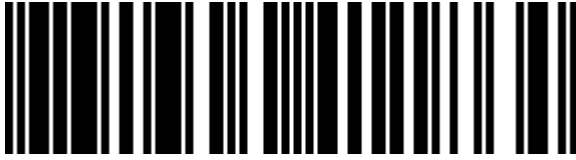

0731304411864



731304411864



8592978410353

Disclaimer. The information published here (the "Information") is based on sources that can be considered reliable, typically the manufacturer, but this Information is provided "AS IS" and without guarantee of correctness or completeness. The Information is only indicative and can be changed at any time without notification. No rights can be based on the Information. Suppliers or aggregators of this Information do not accept any liability with regard to the content of (web)pages and other documents, including its Information. The publisher of the Information can not be held liable for the content of 3rd party websites that are linking this Information or are linked to from this Information. You as the User of the Information are solely responsible for the choice and usage of this Information. You are not entitled to transfer, copy or otherwise multiply or distribute the Information. You are obliged to follow the directions of the copyright owner(s) with regard to the use of the Information. Exclusively Dutch law is applicable. With regard to price and stock data on the site, the publisher followed a number of starting points, which are not necessarily relevant for your private or business circumstances. Therefore, the price and stock data are only indicative and are subject to changes. You are personally responsible for the way you use and apply this information. As a user of the Information or sites or documents in which this Information is included, you will adhere to standard fair use including avoidance of spamming, ripping, intellectual-property violations, privacy violations, and any other illegal activity.