


UniFi

Flex Utility Datasheet

MiRO

Switch Flex Utility SKU: UB-USW-FLEX-UT

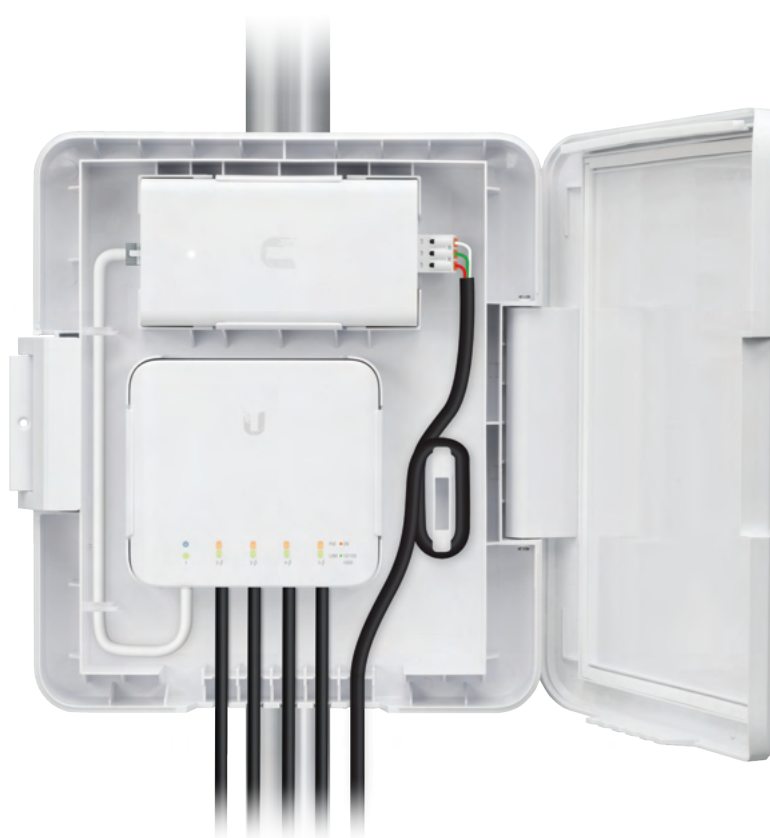

The Switch Flex Utility is an outdoor weatherproof enclosure designed for use with the Switch Flex. Max. PoE budget 46W. Clean cable management and screw lock for security. Includes an Ethernet patch cable and a 60W PoW adapter. Compatible with Switch Flex

Switch Flex Utility

SKU: UB-USW-FLEX-UT

Mechanical

Dimensions	Enclosure: 249 x 218 x 60 mm (9.8 x 8.6 x 2.4") Adapter: 118.5 x 63 x 34.7 mm (4.7 x 2.5 x 1.4")
Weight	Enclosure: 740 g (26.1 oz) Adapter: 206 g (7.27 oz)

60W PoE Adapter

Output voltage	54V, 1.11A
Rated voltage	100-240V AC
Input current	Max. 1.5A
Efficiency	> 86%
Output ripple	200mVpp
Line regulation	< 1%
Load regulation	< 3%
4-pair powering	Pins 1, 2, 4, 5+ and Pins 3, 6, 7, 8-
Operating temperature	-20 to 60° C (-4 to 140° F)
Storage temperature	-30 to 70° C (-22 to 158° F)
Operating humidity	5 to 90%, noncondensing
Surge immunity	4kV difference and Common mode

Switch Flex Utility SKU: UB-USW-FLEX-UT

